


Three Problems. Solved Once.

Marquee treats the dance floor as three engineering problems solved once — a panel that survives years of heels and heavy load-in, an edge that transitions safely to whatever it is sitting on, and a kit a two-person crew can build without a manual. Furniture Innovations manufactures and supports every piece directly.

THE SYSTEM

Panel, Edge, Kit

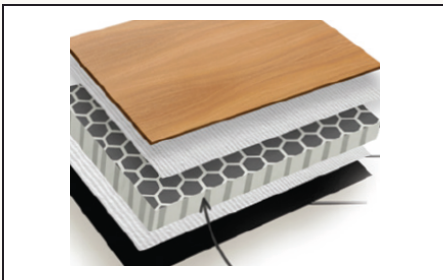

THE PANEL · 4' × 4' MODULAR UNIT

Built in Five Layers

A 3mm high-pressure laminate top — triple the thickness of the 1mm HPL or thin vinyl others use — over a synthetic fiber layer, a resin honeycomb core, a second fiber layer, and the same 3mm HPL on the base. A fully sealed system, top and bottom.

- **Triple-Thickness Surface:** 3mm HPL resists scratches, dents and heel traffic.
- **Waterproof Core:** thermoplastic honeycomb absorbs zero moisture.
- **Won't Warp or Rot:** sealed on both faces, indoor or outdoor.
- **Sound Absorbing:** fiber layers damp the hollow sound underfoot.

AT A GLANCE

Panel Size	4' × 4'
Surface	3mm HPL, both faces
Core	Thermoplastic honeycomb
Frame	Marine-grade aluminum
Connection	Tool-free camlock
Rated	Indoor & outdoor



THE EDGE · ADA-COMPLIANT TRANSITION

The Part Everyone Overlooks

The edge is what actually keeps a dance floor safe, and it is the piece most systems treat as an afterthought. An extra-wide 5-inch ramp at a 10° slope carries guests from carpet to floor without a lip to catch a heel.

- **Extra-Wide 5" Ramp:** a gentle 10° slope that reduces mis-steps.
- **Anodized Aluminum:** marine-grade, anti-corrosion, reinforced.
- **Four Finishes:** silver, gold, classic gold and black.
- **Tool-Free Camlock:** edges lock to panels without hardware.

AT A GLANCE

Ramp Width	5"
Slope	10°
Material	Anodized aluminum
Finishes	Silver · Gold · Black
Compliance	ADA transition
Connection	Tool-free camlock



THE KIT · READY TO DROP

A Floor in Under an Hour

Panels, edges and corners arrive sized to the room as one kit. A two-person crew builds a flush, ADA-compliant floor without a manual and without tools — from 144 square feet up to a full 1,024.

- **Sized to the Room:** kits from 12' × 12' through 32' × 32'.
- **Two-Person Setup:** assembled in under an hour, no tools.
- **Flush Every Time:** camlocks pull panels tight with no gaps.
- **Six Finish Options:** any kit, any finish, any edge trim.

AT A GLANCE

Kit Sizes	12' to 32' square
Coverage	144 – 1,024 sq ft
Guests Served	50 – 500
Dancing Capacity	15 – 200+
Setup Time	Under one hour
Crew	Two people


SIZE THE FLOOR

Kit Sizes & Capacity

KIT SIZE	COVERAGE	GUESTS SERVED	DANCING CAPACITY
12' x 12'	144 sq ft	Up to 50	15 – 20
16' x 16'	256 sq ft	Up to 150	40 – 60
20' x 20'	400 sq ft	Up to 250	80 – 100
24' x 24'	576 sq ft	Up to 300	100 – 120
32' x 32'	1,024 sq ft	Up to 500	200+


Rule of thumb — allow roughly 3 square feet per dancing guest.

FIVE LAYERS

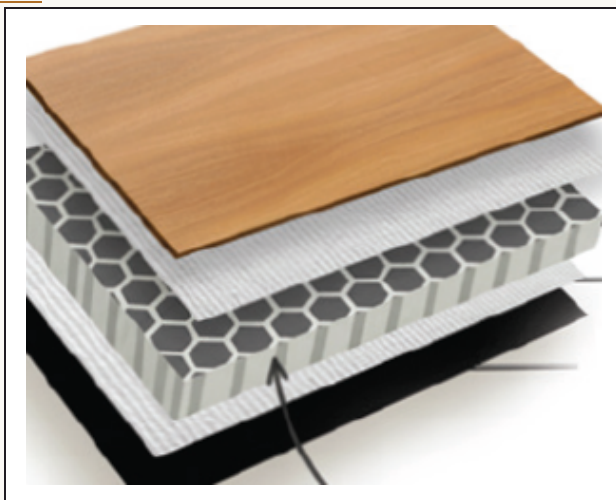

WHAT IS INSIDE THE PANEL

- TOP** **3mm HPL**
Triple the thickness of standard 1mm HPL or thin vinyl.
- 2** **Synthetic fiber layer**
Adds stability and absorbs sound underfoot.
- 3** **Resin honeycomb core**
Lightweight strength and impact resistance.
- 4** **Synthetic fiber layer**
A second damping layer beneath the core.
- BASE** **3mm HPL**
The same surface underneath — a fully sealed system.

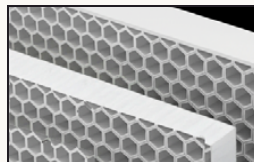


Our PVC honeycomb core outperforms traditional plywood by delivering full water resistance with zero moisture absorption. Unlike plywood it will never warp, rot or weaken over time.


FINISHES & EDGE TRIM



WHITE




FRUITWOOD



CHESTNUT



BLACK & WHITE


CHESTNUT &
FRUITWOOD


BLACK

BUILT TO PERFORM

Engineered Beneath the Surface

3mm HPL Surface

Triple-thickness laminate on both faces resists scratches, dents and years of heel traffic.

Waterproof Core

PVC honeycomb absorbs zero moisture — it will never warp, rot or weaken like plywood.

Marine-Grade Frame

Anodized aluminum with cross-bracing, fire-resistant and anti-corrosion throughout.

ADA Transition Edge

A 5-inch ramp at 10° carries guests on and off the floor without a lip to catch.

Tool-Free Assembly

Camlock connectors pull every panel flush — two people, under an hour, no manual.